



 sunset

ALUMINIUM VENETIAN BLINDS

INSTALLATION GUIDE



WARNING : PLEASE READ BEFORE INSTALLATION

Do not install this product without reading the instructions. Incorrect installation may cause damage or poor performance. Follow all steps carefully for safe and proper fitting.

MEASURING FOR THE BEST FIT

Measure the full width of your window opening and mark the first bracket position. Allow 10 mm clearance for inside recess fittings, or add around 120 mm for outside recess fittings to minimise light gaps.

STEP 1: FITTING BRACKETS

Unpack your Venetian blind and check that all fixing components are included.


Venetian blinds are supplied with swivel brackets as standard, with additional brackets provided for wider blinds.

Before installation, choose the most suitable fixing method for your window.

You can choose between:


- Top Fixing (inside the recess)
- Face Fixing (outside the recess)

TOP FIXING

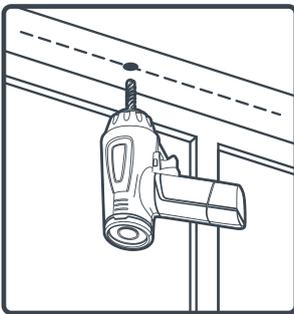


1. Mark the drilling position and drill a hole with an impact drill.

FACE FIXING

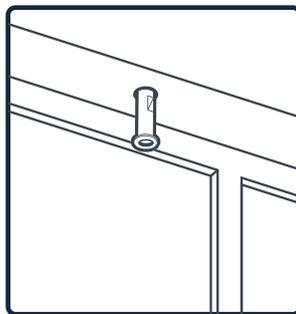

What you'll need?

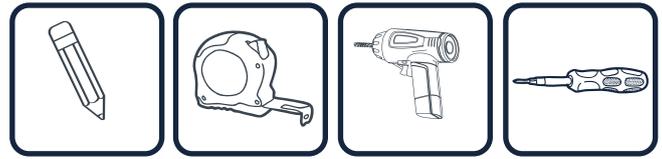

Pencil

Measuring tape

Drill

Screwdriver

What's inside the box?



①


Mounting Bracket

②


Screw

③

Expansion Tube

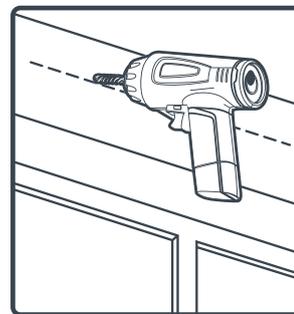


2. Insert the expansion tube ③

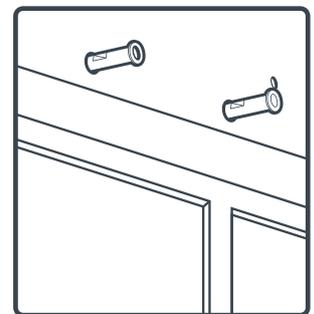


STEP 2: Install the mounting brackets ① one by one and tighten the screws ②



TOP FIXING

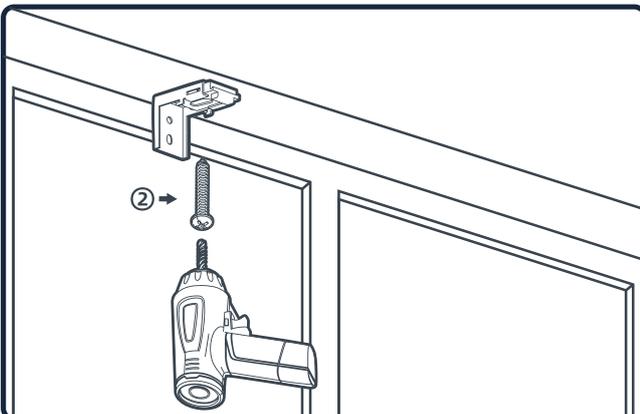


FACE FIXING

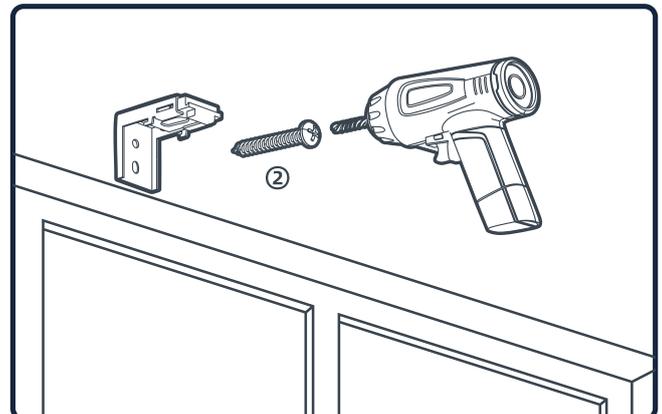

STEP 3: Snap the product into the mounting bracket

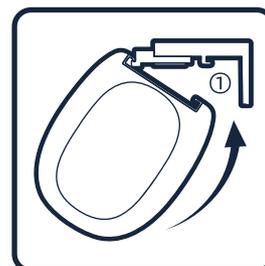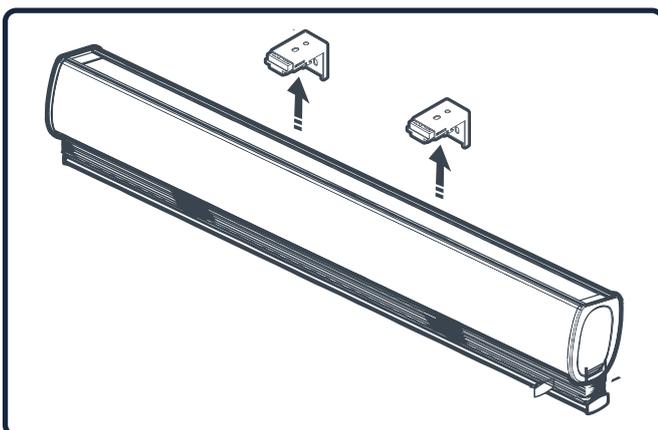


First, snap the rear slot of the product into the mounting bracket.

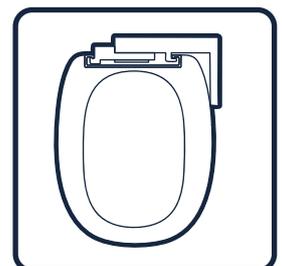

Push upward in the direction of the arrow to install the product in place.

OPERATIONAL ATTENTIONS

- Do not hang clothes or any other objects on the product. Children must not use the cord as a toy, as the product may fall and cause injury.

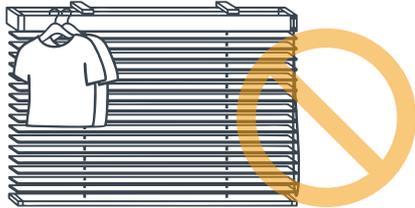


- Do not apply excessive force to the pull beads. Excessive force may cause the blinds to detach and result in injury. The product must be installed in a level and horizontal position to ensure correct slat alignment, maintain proper light-blocking performance, and ensure safe operation.




- When operating the pull bead/pull cord, the rope must be held securely by hand at all times. This is required to maintain safe control of the mechanism and to prevent operational faults or damage caused by human error.



- Keep the product away from open flames and heat sources to prevent potential fire hazards.

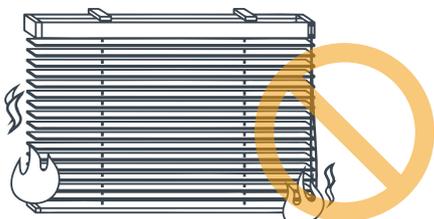


- The pull cord must never be wrapped around the body, wrist, or neck. Always keep the pull cord at a height that is out of reach of infants and children to prevent accidents.

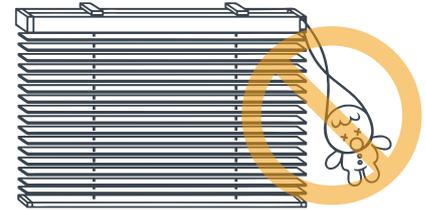


CHILD SAFETY

- Keep the window closed to prevent the blind slats from bending or the ladder string from being damaged due to wind pressure.

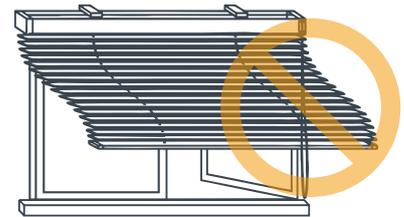

- Do not place any objects within the lifting range of the blinds. Obstructions may interfere with the mechanism and cause damage to the product.

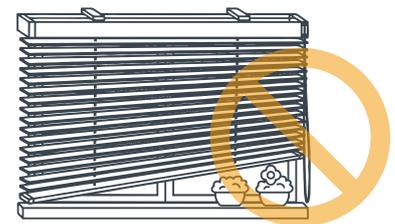

- Lubrication of any rotating parts or movable sections is strictly prohibited. Applying lubricants may impair the mechanism and cause damage to the blinds.

